



Rockmills Steel Products [©]

Excellence Since 1954

(516) 829-8555

Info@rockmillsboilers.com

(718) 366-8300

Specifications



Series MP4

Horse Power:
Efficiency

MP-4-212

212 H.P.
Up to 85%

Gross Output

Steam	29569.6	SQ.FT
Steam	7096.7	MBH
Steam (per hr from & at 212 Deg F)	7314	LBS

Net Rating

SQ.Ft of Steam	22872	SQ.FT
MBH of Steam	5489.3	MBH

Firing Rate

Light Oil (140000 BTU/Gal)	63.9	GPH
Heavy Oil (150000 BTU GAL)	59.6	GPH
GAS	8871	MBH

General Information

Heating Surface	875	SQ.FT
Furnace Volume	111.83	CU. FT
Safety Valve Relieving Capacity - Required Steam (Min)	7097	LB/HR
Steam Outlet Pipe Size	8	IN
Dry Boiler Weight (Approximate)	16,950	LB
Operating Weight (Approximate)	27,179	LB



Rockmills Steel Products ©

Excellence Since 1954

(516) 829-8555

Info@rockmillsboilers.com

(718) 366-8300

Dimensions




Series MP-4

Horse Power:
Efficiency

MP-4-212

212 H.P.
Up to 85%

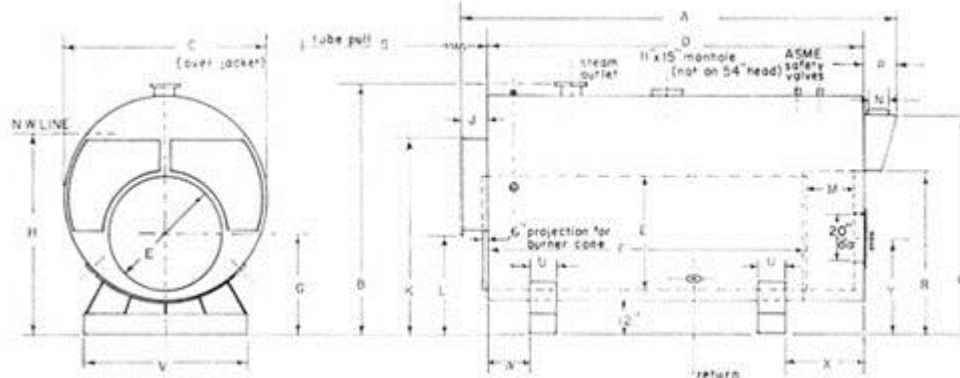

** As per ASME code all boilers with a diameter greater than 60" will be equipped with 12"x16" manhole

Dimensions

		14-10	FT-IN.
A	Overall Length		
B	Overall Height	91.5	IN.
C	Shell Diameter (Over jacket 2" thick)	76	IN.
D	Shell Length	12-1	FT-IN.
E	Furnace Diameter	40	IN.
F	Furnace Length	120	IN.
G	Height-Centerline of Furnace	36	IN.
H	Normal Water Line	72.375	IN.
J	Depth-Front Reversing Chamber	10	IN.
K	Height-Front Rev. Chamber Top	71.5	IN.
L	Height-Front Rev. Chamber Bottom	33.5	IN.
M	Depth-Rear Combustion Chamber	18	IN.
N	Vent Outlet Diameter	20	IN.
P	Depth-Smoke Box	23	IN.
Q	Height-Smoke hood Top	80.75	IN.
R	Height-Smoke hood Bottom	58.25	IN.
S	Tube Pull	12-1	FT-IN.
U	Saddle Width	8	IN.
V	Saddle Length	60	IN.
W	Position-Front Saddle	14	IN.
X	Position-Rear Saddle	21	IN.
Y	Centerline of Access Door	29.5	IN.
Z	Manhole	12 x 16	IN.
	Handhole	3 x 4	IN.