



Rockmills Steel Products [©]

Excellence Since 1954

(516) 829-8555

Info@rockmillsboilers.com

(718) 366-8300

Specifications



Series MP4

Horse Power:
Efficiency

MP-4-351

351 H.P.
Up to 85%

Gross Output

Steam	48957.2	SQ.FT
Steam	11749.7	MBH
Steam (per hr from & at 212 Deg F)	12109.5	LBS

Net Rating

SQ.Ft of Steam	37868.4	SQ.FT
MBH of Steam	9088.4	MBH

Firing Rate

Light Oil (140000 BTU/Gal)	105.5	GPH
Heavy Oil (150000 BTU GAL)	98.4	GPH
GAS	14687.1	MBH

General Information

Heating Surface	1500	SQ.FT
Furnace Volume	184.66	CU. FT
Safety Valve Relieving Capacity - Required Steam (Min)	12000	LB/HR
Steam Outlet Pipe Size	10	IN
Dry Boiler Weight (Approximate)	27,800	LB
Operating Weight (Approximate)	44,010	LB



Rockmills Steel Products ©

Excellence Since 1954

(516) 829-8555

Info@rockmillsboilers.com

(718) 366-8300

Dimensions




Series MP-4

Horse Power:
Efficiency

MP-4-351

351 H.P.
Up to 85%

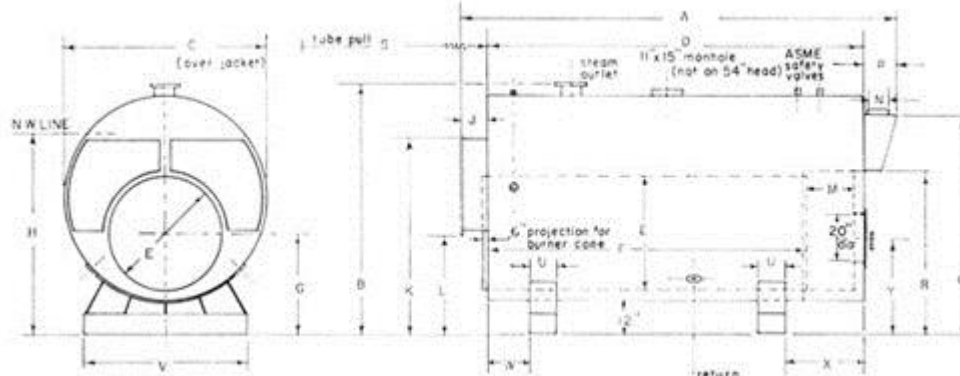

** As per ASME code all boilers with a diameter greater than 60" will be equipped with 12"x16" manhole

Dimensions

		16-5	FT-IN.
A	Overall Length		
B	Overall Height	110	IN.
C	Shell Diameter (Over jacket 2" thick)	94	IN.
D	Shell Length	13-1	FT-IN.
E	Furnace Diameter	48	IN.
F	Furnace Length	126	IN.
G	Height-Centerline of Furnace	38.5	IN.
H	Normal Water Line	87	IN.
J	Depth-Front Reversing Chamber	10	IN.
K	Height-Front Rev. Chamber Top	85	IN.
L	Height-Front Rev. Chamber Bottom	40.125	IN.
M	Depth-Rear Combustion Chamber		IN.
N	Vent Outlet Diameter	26	IN.
P	Depth-Smoke Box	29	IN.
Q	Height-Smoke hood Top	98	IN.
R	Height-Smoke hood Bottom	69.75	IN.
S	Tube Pull	13-1	FT-IN.
U	Saddle Width	8	IN.
V	Saddle Length	78	IN.
W	Position-Front Saddle	14	IN.
X	Position-Rear Saddle		IN.
Y	Centerline of Access Door	29.25	IN.
Z	Manhole	12 x 16	IN.
	Handhole	3 x 4	IN.